


H nach DIN 8187

Hochleistungs-Rollenketten

nach DIN 8187

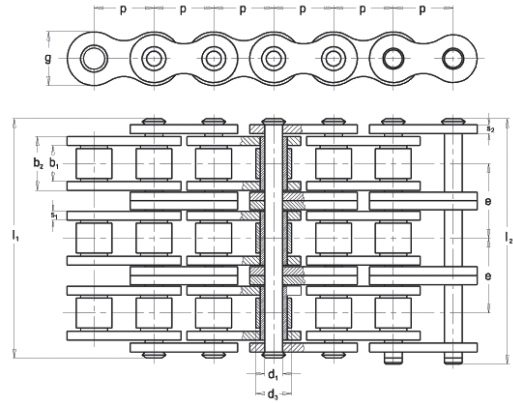

Dreifach-Rollenketten

nach DIN 8187

Artikel-Nr.	ISO Nr.	Teilung		Rolle d3 [mm]	Bolzen			Lasche			e [mm]	f [mm]	Bruchkraft		Gewicht Q [kg/m]
		P [mm]	b1 [mm]		d1 [mm]	l1 [mm]	l2 [mm]	g [mm]	s1 [mm]	s2 [mm]			DIN 8187 [kN]	mittlere [kN]	
H 03.090-000	06B-3	9,525	5,72	6,35	3,28	32,9	34,6	8,20	1,20	1,00	10,24	84	26,1	28,1	1,1
H 03.124-000	08B-3	12,700	7,75	8,51	4,45	44,3	47,2	11,80	1,60	1,40	13,92	151	46,7	61,3	1,9
H 03.150-000	10B-3	15,875	9,65	10,16	5,08	51,9	54,7	14,50	1,60	1,60	16,59	202	70,0	88,7	2,7
H 03.190-000	12B-3	19,050	11,68	12,07	5,72	61,3	63,5	16,10	1,80	1,80	19,46	268	91,0	114,9	3,6
H 03.250-000	16B-3	25,400	17,02	15,88	8,28	99,1	103,4	21,00	3,50	3,00	31,88	619	195,0	185,0	7,9
H 03.310-000	20B-3	31,750	19,56	19,05	10,19	114,1	118,9	26,00	4,50	3,50	36,45	887	250,0	270,0	11,2
H 03.380-000	24B-3	38,100	25,40	25,40	14,63	150,0	155,2	33,40	6,00	5,00	48,36	1663	425,0	450,0	20,7
H 03.450-000	28B-3	44,450	30,99	27,94	15,90	184,0	188,8	36,60	7,00	6,00	59,56	2218	530,0	560,0	27,0
H 03.510-000	32B-3	50,800	30,99	29,21	17,81	181,0	190,2	41,80	7,00	6,00	58,55	2431	670,0	700,0	28,3
H 03.635-000	40B-3	63,500	38,10	39,37	22,89	225,0	230,9	52,00	8,00	8,00	72,29	3825	950,0	1000,0	43,3
H 03.760-000	48B-3	76,200	45,72	48,26	29,24	281,0	290,3	63,40	12,00	10,00	91,21	6184	1500,0	1530,0	72,5