


nach DIN 8188

Hochleistungs-Rollenketten



nach DIN 8188

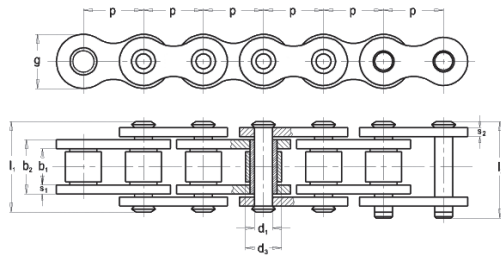


Einfach-Rollenketten nach DIN8188



Artikel-Nr.	ANSI	Teilung		Rolle		Bolzen		Lasche				Bruchkraft		Gewicht Q [kg/m]
		P [mm]	b1 [mm]	d3 [mm]	d1 [mm]	l1 [mm]	l2 [mm]	g [mm]	s1 [mm]	s2 [mm]	f [mm]	DIN 8187 [kN]	mittlere [kN]	
HA 01.124-000	40-1	12,700	7,85	7,95	3,96	16,4	19,0	12,0	1,5	1,5	44	17,50	17,5	0,7
HA 01.150-000	50-1	15,875	9,40	10,16	5,08	20,1	22,9	15,0	2,0	2,0	70	27,20	27,2	0,8
HA 01.190-000	60-1	19,050	12,57	11,91	5,94	25,4	28,3	18,0	2,4	2,4	105	32,66	42,6	1,5
HA 01.250-000	80-1	25,400	15,75	15,88	7,92	33,1	37,4	24,0	3,2	3,2	179	60,00	60,0	2,9
HA 01.310-000	100-1	31,750	18,90	19,05	9,53	40,5	45,2	29,4	4,0	4,0	261	88,50	104,0	4,0
HA 01.380-000	120-1	38,100	25,22	22,23	11,10	50,8	55,5	35,0	5,0	5,0	392	127,00	140,0	6,0
HA 01.450-000	140-1	44,450	25,22	25,40	12,70	54,7	59,3	41,0	5,5	5,5	470	172,40	186,0	7,0
HA 01.510-000	160-1	50,800	31,55	28,58	14,27	65,5	69,6	47,0	6,5	6,5	642	226,80	240,0	10,0
HA 01.635-000	200-1	63,500	37,85	39,68	19,84	79,6	85,4	59,0	8,0	8,0	1085	353,80	390,0	16,6
HA 01.760-000	240-1	76,200	47,35	47,63	23,80	95,5	103,1	70,0	9,5	9,5	1607	510,30	580,0	22,6

ab Teilung 100-1 ebenfalls mit erhöhter Dauerfestigkeit erhältlich

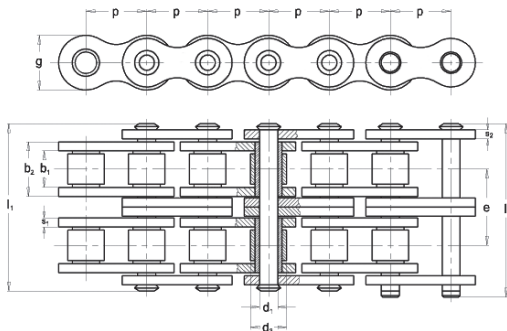

Zweifach-Rollenketten nach DIN8188

Artikel-Nr.	ANSI	Teilung		Rolle		Bolzen		Lasche				Bruchkraft		Gewicht Q [kg/m]	
		P [mm]	b1 [mm]	d3 [mm]	d1 [mm]	l1 [mm]	l2 [mm]	g [mm]	s1 [mm]	s2 [mm]	e [mm]	f [mm]	DIN 8187 [kN]		mittlere [kN]
HA 02.124-000	40-2	12,700	7,85	7,95	3,96	30,7	33,4	12,0	1,5	1,5	14,38	88	28,2	28,2	1,3
HA 02.150-000	50-2	15,875	9,40	10,16	5,08	38,2	39,9	15,0	2,0	2,0	18,11	140	44,4	54,4	1,4
HA 02.190-000	60-2	19,050	12,57	11,91	5,94	48,2	51,2	18,0	2,4	2,4	22,78	210	63,6	85,5	3,0
HA 02.250-000	80-2	25,400	15,75	15,88	7,92	62,4	66,7	24,1	3,2	3,2	29,29	356	113,0	114,0	5,6
HA 02.310-000	100-2	31,750	18,90	19,05	9,53	76,4	81,2	29,4	4,0	4,0	35,76	522	177,0	190,0	7,9
HA 02.380-000	120-2	38,100	25,22	22,23	11,10	96,3	100,9	35,0	5,0	5,0	45,44	784	254,0	280,0	11,8
HA 02.450-000	140-2	44,450	25,22	25,40	12,70	102,8	108,2	41,0	5,5	5,5	48,87	940	344,8	360,0	13,8
HA 02.510-000	160-2	50,800	31,55	28,58	14,27	124,0	128,2	47,0	6,5	6,5	58,55	1284	453,6	460,0	19,9
HA 02.635-000	200-2	63,500	37,85	39,68	19,84	151,0	157,0	59,0	8,0	8,0	71,55	2170	707,6	740,0	33,0
HA 02.760-000	240-2	76,200	47,35	47,63	23,80	183,0	191,0	70,0	9,5	9,5	87,83	3213	1020,6	1100,0	44,0

ab Teilung 100-2 ebenfalls mit erhöhter Dauerfestigkeit erhältlich