


Kettenkupplungen


leichte Baureihe



Artikel-Nr.	Teilung	Drehmoment max. Nm	Zähne	Bohrung		d_n mm	L mm	L_1 mm	D mm
				d_b	$d_{b \max.}$				
L 090-012	3/8" x 7/32"	55	12	8	16	25	16	37	46
L 090-016	3/8" x 7/32"	75	16	10	20	35	16	37	57
L 090-020	3/8" x 7/32"	100	20	10	20	35	16	37	69
L 124-012	1/2" x 5/16"	120	12	10	20	33	20	46,9	61
L 124-016	1/2" x 5/16"	180	16	12	32	50	25	56,9	77
L 124-020	1/2" x 5/16"	240	20	12	32	50	25	56,9	93
L 150-016	5/8" x 3/8"	280	16	12	36	60	30	67,9	96
L 150-018	5/8" x 3/8"	300	18	14	40	70	30	67,9	106
L 190-014	3/4" x 7/16"	400	14	16	40	64	30	69	102
L 190-016	3/4" x 7/16"	450	16	16	45	75	35	79	114
L 190-022	3/4" x 7/16"	510	22	20	55	90	40	89	150
L 250-014	1" x 17,02	600	14	16	50	84	40	96	135
L 250-016	1" x 17,02	880	16	20	60	100	45	108	151

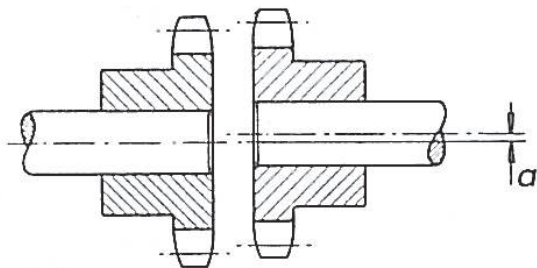

Zulässige Mittenabweichung „a“

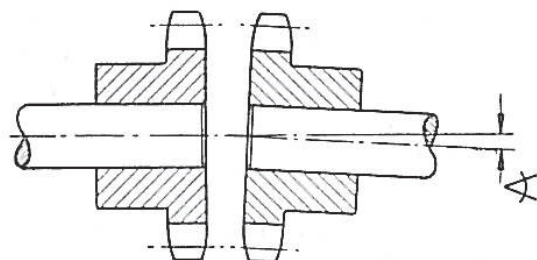

Zulässige Winkelverlagerung „Δ“

