


nach DIN 8187

Präzisions-Rollenketten



nach DIN 8187

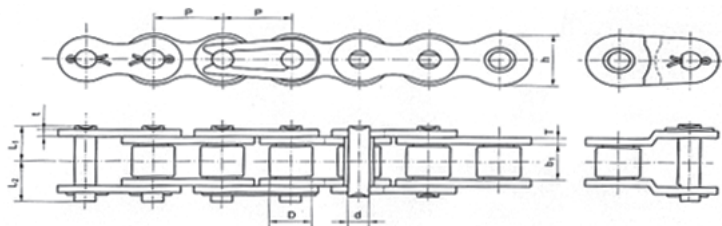

Einfach-Rollenketten

nach DIN 8187



Artikel-Nr.	ISO Nr.	Teilung		Rolle D (max) [mm]	Bolzen		Lasche			Bruchkraft		Gewicht q [kg/m]
		P [mm]	b1 (min) [mm]		Ø d [mm]	(L1+L2) [mm]	Höhe h [mm]	Außenlasche t [mm]	Innenlasche T [mm]	DIN 8187 [kN]	mittlere [kN]	
01.080-000	05B-1	8,000	3,00	5,00	2,31	7,95	7,10	0,80	0,80	5,00	6,00	0,19
01.090-000	06B-1	9,525	5,72	6,35	3,28	13,15	8,25	1,30	1,30	9,00	10,80	0,38
01.124-000	08B-1	12,700	7,75	8,51	4,45	16,85	11,80	1,60	1,60	18,00	21,60	0,74
01.150-000	10B-1	15,875	9,65	10,18	5,08	19,50	14,80	1,70	1,70	22,40	26,88	0,95
01.190-000	12B-1	19,050	11,68	12,07	5,72	22,45	16,10	1,85	1,85	29,00	34,80	1,23
01.250-000	16B-1	25,400	17,02	15,88	8,28	35,50	21,00	3,24	3,24	60,00	72,00	2,77
01.310-000	20B-1	31,750	19,56	19,05	10,19	40,40	26,00	3,60	4,50	95,00	107,00	3,90
01.380-000	24B-1	38,100	25,40	25,40	14,63	53,30	33,00	5,00	6,00	160,00	178,00	7,13
01.450-000	28B-1	44,450	30,99	27,94	15,90	65,10	36,70	6,20	7,50	200,00	225,00	9,36
01.510-000	32B-1	50,800	30,99	29,21	17,81	65,60	41,90	6,20	7,00	250,00	278,00	9,94
01.635-000	40B-1	63,500	38,10	39,37	22,98	80,20	52,50	7,90	8,20	355,00	-	17,50

alle Ketten verpackt, in 5 m Enden

Einfach-Rollenketten auf Haspel

Artikel-Nr.	ISO Nr.	Teilung P [mm]	Länge [m/Haspel]
01.090-000 R	06 B-1	9,525	100
01.124-000 R	08 B-1	12,700	100
01.150-000 R	10 B-1	15,875	100
01.190-000 R	12 B-1	19,050	100
01.250-000 R	16 B-1	25,400	25

Einfach-Rollenketten mit 45% Vorreckung

Artikel-Nr.	ISO Nr.	Teilung P [mm]
01.124-000 +	08 B-1	12,700
01.150-000 +	10 B-1	15,875
01.190-000 +	12 B-1	19,050

Einfach-Rollenketten mit gerader Lasche

Artikel-Nr.	ISO Nr.	Teilung		Rolle D (max) [mm]	Bolzen		Lasche			Bruchkraft		Gewicht q [kg/m]
		P [mm]	b1 (min) [mm]		Ø d [mm]	(L1+L2) [mm]	Höhe h [mm]	Außenlasche t [mm]	Innenlasche T [mm]	DIN 8187 [kN]	mittlere [kN]	
01.124-000 *	08BZ-1	12,700	7,75	8,51	4,45	18,40	12,20	1,65	1,65	17,80	20,50	0,85
01.150-000 *	10BZ-1	15,875	9,65	10,18	5,08	20,50	14,60	1,65	1,65	22,20	27,50	1,05
01.190-000 *	12BZ-1	19,050	11,68	12,07	5,72	23,40	16,00	1,80	1,80	28,90	32,50	1,31
01.250-000 *	16BZ-1	25,400	17,02	15,88	8,28	36,71	20,90	3,20	4,00	60,00	71,00	3,02
01.310-000 *	20BZ-1	31,750	19,56	19,05	10,19	44,00	26,00	3,60	4,50	96,00	107,00	4,11